




**WORLDWIDE USERS PRAISE
LJ20'S ADAPTABILITY!**



SUZUKI

LJ20

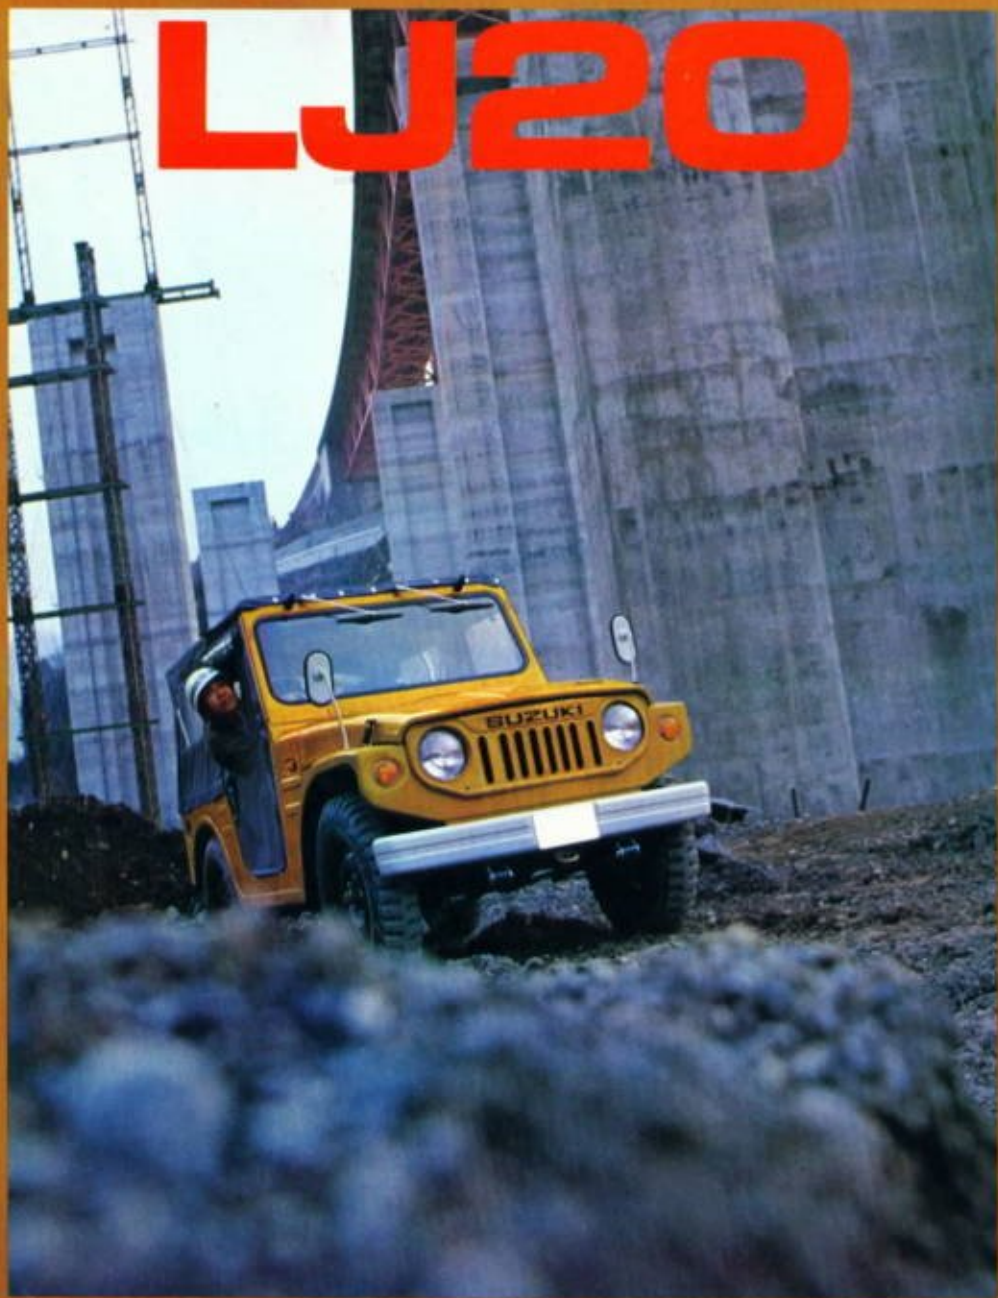

SUZUKI MOTOR CO., LTD.



SUZUKI LJ20 IS A LIGHTWEIGHT COMPACT FOUR-WHEEL-DRIVE VEHICLE CAPABLE OF RUNNING ON ANY BAD ROAD

The four-wheel-drive system enables driving on roads under all unfavorable conditions such as in the desert, sandy ground, muddy ground, rough road, steep grade and snowy ground.

The vehicle is driven by the rear wheels like ordinary cars on paved roads. On bad roads, operating the transfer, the power is also transmitted to the front wheels. Assisted by the transfer (auxiliary transmission) with a high-low speed selector, the vehicle is capable of running under conditions which match the road conditions.

In addition, its climbing ability is 35 degrees. It readily climbs such steep grades that cannot be climbed by men without use of the hands on the ground. Thanks to its compact size, LJ20 can make tight turns. LJ20 lightly drives through narrow mountain roads.

TOUGH! WATER-COOLED 2-STROKE ENGINE

LJ20 is powered by a high performance "water-cooled" 2-stroke engine that enables LJ20 to fully exhibit the power of its four-wheel-drive.



"Reed valve" providing superior suction efficiency are adopted to enable the engine to exhibit the power to its maximum capacity. Consequently, the engine is powerful and tough, producing high torque at low and medium speeds.

The method of cooling employed is to cool the radiator located in front simultaneously by air from the front and

by a cooling fan. This system exhibits superior cooling effect that does not change cylinder temperature even during extended driving over a long period. The engine is powerful and withstands the uses under any severe conditions.

EPOCH-MAKING DIRECT LUBRICATION SYSTEM SUZUKI CCI

SUZUKI CCI is a mechanism that warrants high engine performance which is inherent to 2-stroke engines. Pure undiluted lubricating oil is directly supplied to the crankshaft and big ends of connecting rods at the rates matching the power output of the engine. As the oil is also supplied to cylinders at the same time, ideal lubrication is provided in the interior of the engine, resulting in improved performance and extended durability.

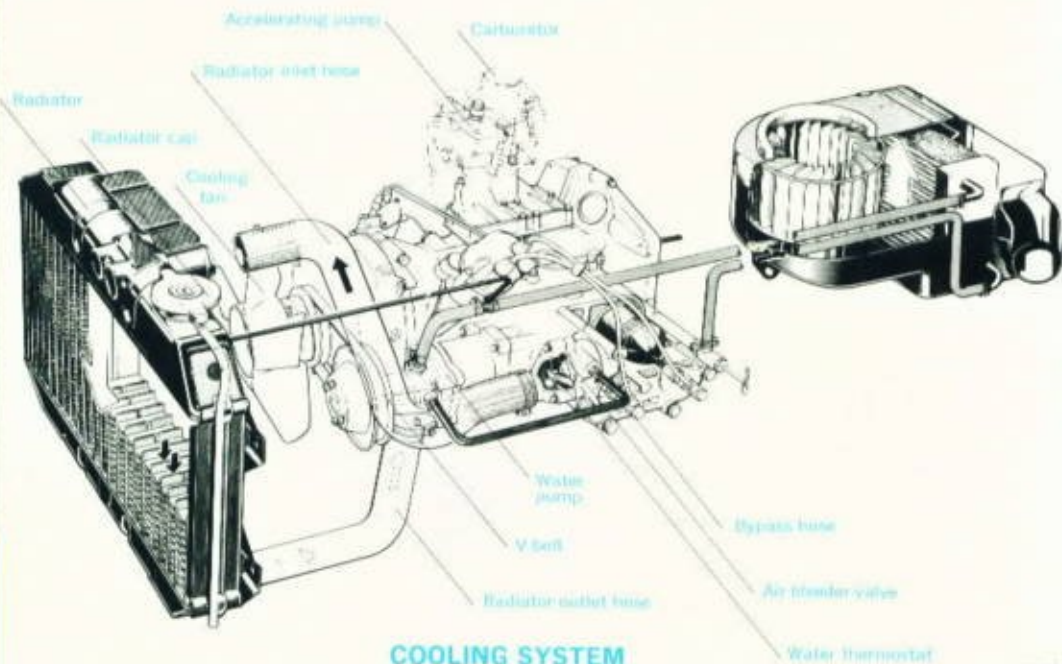

SUZUKI'S ATTENTION TO THE DETAILS GOES FURTHER!



Parking brake with anti-theft locking device (LJ20)



Spare tire which ensures wide cargo space (LJ20)



Window washer (LJ20, LJ20V)



Towing bar & foot step (LJ20, LJ20V)



Full width back door (LJ20V)

EASEFUL CANVAS HOOD IN SETTING AND DETACHING



1. Fold the side and rear canvas sheets up.



2. Disconnect the hooks connecting the top canvas to the front window. Then roll the top canvas together with the side and rear canvas sheets towards the rear of the vehicle.
3. Loosen the knobs fixing the frames of the canvas sheets to the body. Then collapse the frames towards the rear.
4. Detach the canvas doors by unfastening the buttons attaching the doors to the sides of the front window.



*The hood (including doors) is optional.

LJ20 can be modified or converted into various vehicles for exclusive uses.



FIRE PUMP





MAIL CART

LJ20**LJ20V****SPECIFICATIONS**

	LJ20	LJ20V
Maximum Speed	80kph (50 mph)	80kph (50mph)
Maximum Horsepower	28hp/5,500rpm	28hp/5,500rpm
Maximum Torque	3.8kg-m (27.5 lb-ft) /5,000rpm	3.8kg-m (27.5 lb-ft) /5,000rpm
Climbing Ability	35°	32.5°
Engine Type	2-stroke, water-cooled, 2-cylinder	2-stroke, water-cooled, 2-cylinder
Piston Displacement	359cc (21.9 cu in)	359cc (21.9 cu in)
Bore x Stroke	61.0 x 61.5mm (2.40 x 2.41 in)	61.0 x 61.5mm (2.40 x 2.41 in)
Transmission	4-speed forward, all synchronesh, 1 reverse	4-speed forward, all synchronesh, 1 reverse
Transfer	2-speed	2-speed
Fuel Tank Capacity	26 ltr (6.86/5.72 gal, US/Imp)	26 ltr (6.86/5.72 gal, US/Imp)
Oil Tank Capacity	2.8 ltr (0.74/0.62 gal, US/Imp)	2.8 ltr (0.74/0.62 gal, US/Imp)
Cooling System	Water-cooling	Water-cooling
Maximum Load Capacity	250kg (550 lbs)	200kg (440 lbs)
Seating Capacity	2 persons	2 persons
Overall Length	3,195mm (125.8 in)	3,025mm (119.1 in)
Overall Width	1,295mm (51.0 in)	1,295mm (51.0 in)
Overall Height	1,670mm (65.7 in)	1,615mm (63.6 in)
Wheelbase	1,930mm (76.0 in)	1,930mm (76.0 in)
Tires	6.00-16, 4PR	5.60-15, 4PR
Curb Weight	625kg (1,378 lbs)	660kg (1,455 lbs)

*Specifications subject to change without notice.

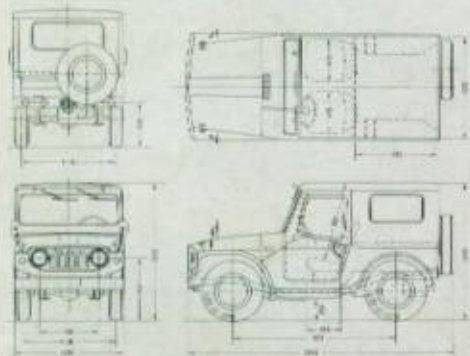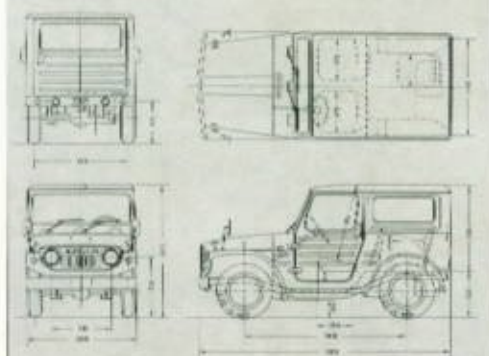LJ20**LJ20V**

Sun Stone Cream

Indi Ocher

Sirius Green

Alphald Beige



akes, there is no
CCI
 SUZUKI MOTOR CO., LTD.
 300 Takatsuka, Hamamatsu, Japan

Printed in Japan